

KAPIL PRE-CAST & INFRA PVT.LTD.

an ISO 9001:2015 Certified Company









Full Range Of Concrete Products For Pre-cast, CC Solid / Hollow Blocks, Prestressed Wall Pannels / Poles, Pavers & Other Concrete Related Products.

Company Profile

Kapil Pre-cast (Unit of Kapil Group) introduce ourselves as the company that cares for quality products. We are manufacturers of Pre Stressed Precast compound wall with different designs, as per customer requirements. These can be used as partition walls for godowns, Labour quarters, With the culture of deep dedication to work, determination to succeed, our company today enjoys a premium position among the indigenous class manufacturers.

Why Kapil Pre-cast

Our Products are manufactured under stringent norms, the raw material are procured from reputed manufacturers and suppliers are accepted through rigorous quality control norms. all these enable us to maintain a satisfactory clients


Kapil Pre-cast products have many great features as they are produced by the raw material that are procured from reputed manufacturers and suppliers who have a history of supplying top quality materials.

At Kapil Pre-cast we design and construct precast office buildings that meet the requirements of our clients and also the social environment from designs to delivery information, everything is discussed, governed and monitored by a group of experienced engineers to give the best possible that not only meets the client's expectation but is also parallel to the modern office architecture.

Product Advantages

Pre-Cast compound wall is Stronger, more Durable, Lean, Time saving and Economical than traditional compound wall.

◆ Durability
◆ Re-Installable
◆ No Foundation Required
◆ Less Space utilized i.e., space saving.
◆ Plastering not required
◆ Speedy Installation
◆ Economy compared to conventional products.

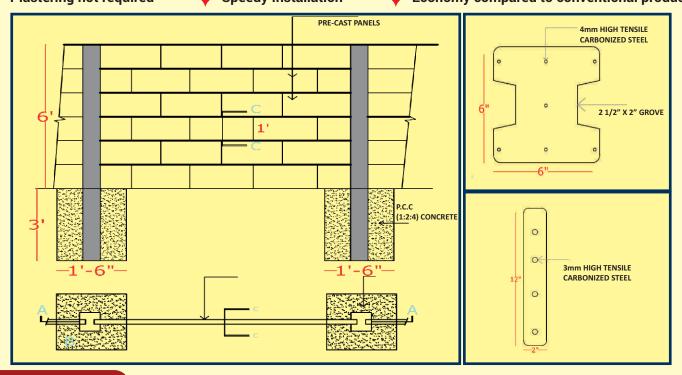

Technical Details

Pole Dimensions :	150mm x 150mm, Length 4 feet to 14 feet, groove width 60mm and depth 40mm.
Pole Weight :	14 kg/Rft (Approx)
Pole Reinforcement :	4mm dia. high tensile carbonized steel indented wire 7nos.
Panel Dimensions :	1 foot wide (300mm), 50mm (2 inch thick), 7 feet length (2.10 mts.)
Panel Weight:	7'.0"x1'.0" Size 77 kg. (Approx)
Panel Reinforcement :	3mm dia. high tensile carbonized steel indented wire 4 nos.
Grade of Concrete :	M-25 Design max.

CONCRETE BLOCK PLANT

PRODUCTS: HOLLOW & SOLID BLOCKS | PAVER TILES | KERB STONE | FLY ASH BRICKS



Kapil Pre-cast - A Brand of Absolute Quality

We are Supplying Cement Concrete Products to Customers from all sectors like Townships, Universities, Industries, Govt. Projects ,Reputed Architects & Govt. Contractors.

We have our Manufacturing Facility which is the one of Largest and most Organized Plant in Hyderabad with Best in Class Design and Infrastructure and are equipped with Latest Machines and Equipments based on American technology which ensures Quality.

Our Strategy and Financial Strength allow us to focus on long term partnerships and we constantly strive to anticipate the rapidly changing needs of our clients and to develop new products & designs to meet those needs.



Hollow Block 400x200x200 mm



Solid Block 290x150x140 mm



Flyash Brick 230x110x70 mm



Hollow Block 400x150x200 mm



Solid Block 290x112x140 mm



Kerbstone 450x400x100 mm



Hollow Block 400x100x200 mm



Unistone Paver 225x112.5x80 mm



I - Stone Paver 200x140x60/80 mm


























MEMBER



SINCE 1981

KAPIL PRE-CAST & INFRA PVT.LTD.

an ISO 9001:2015 Certified Company

Regd. Office: Plot No-16, Simhapuricolony, West Marredpally, Secunderabad-500026,

Ph: 040-27806669, e-mail: info@kapilprecast.com

Plant Location : Saptagiri Colony (Kapil Homes) Railapur Village, Near Nagaluru Village, Medchal Dist. **Contact Person :** Mr.Adi Reddy , Mobile No.8096912317, e-mail : adireddym@kapilprecast.com

website: www.kapilprecast.com